

# ULD-40™

## Corona Effect Ultrasonic Detector

The ULD-40™ is an ultrasonic detector designed for corona effect, arcing and gas leak detection. Results are instantaneously displayed on its easy to read digital display and bar graph while the ultrasonic signal is converted to audible range and played back from its built-in speaker or connected headset.

## Highlights

- Corona Effect, Arcing & Gas Leak Detection
- Built-In or External Sensor
- Array of Sensors Available
- Lightweight and Rugged Design
- Batteries Last For Hours
- Ready to Operate in Seconds
- Designed for Factory or Field Applications

Free interactive presentation:



[Click here to schedule](#)



[sales@ndbtech.com](mailto:sales@ndbtech.com)



[ndbtech.com](http://ndbtech.com)

**ndb**  
Technologies



## Corona Effect Arcing Gas Leak

- The ULD-40™ is perfectly suited for new installations & maintenance work
- 20+ years experience in the Partial Discharge field
- **Buy with confidence.** Training and support is included and provided by ndb Tech's skilled experts who performed hundreds of successful inspections



فن آوران مادون قرمز (سهامی خاص)  
Fanavaran Madoon Ghermez P.J.S


تهران، بلوار کریمخان زند، شماره ۱۰۳، واحد ۴، کد پستی: ۱۵۸۵۶۸۳۷۳۵ | تلفن: ۸۸۸۱۳۱۰۱ | فاکس: ۸۸۸۱۳۱۰۲ | [www.fmg-tech.ir](http://www.fmg-tech.ir) | [info@fmg-tech.ir](mailto:info@fmg-tech.ir)  
Flat 4, No.103, Karimkhan Zand Ave., Tehran-1585683735, Iran | Tel: +98(21)88813101 | [www.ir-tc.com](http://www.ir-tc.com) | E-mail: [info@ir-tc.com](mailto:info@ir-tc.com)

## Technical Specs

Dynamic Range	96 dB
Sensitivity (Built-in Sensor)	10ft : Diameter Leak 0.005 in @ 5psi 3m: Diameter Leak 0.125 mm @ 0.35 Bar
Center Frequency	40 kHz
Operation Distance	Optimized for 3 meters / 10ft
Bandwidth	38 to 48 kHz
Output Frequency for 40 kHz	2.4 kHz
Sampling Frequency	120 kHz
Battery Type	Lithium Ion
Battery Voltage and Current	3.6V 750mA
Battery Charging Voltage	5V ±10%
Battery Autonomy	4 hours
Battery Charge Time	2.5 hours
Power Consumption	160 mA
Audio Output Impedance	32 ohm
Audio Output Level	1V peak-peak
Audio Output Center Frequency	2.4 kHz
Operation Temperature	-20 to 60°C (-4 to 140°F)
Storage Temperature	-30 to 85°C (-22 to 185°F)
Charging Temperature	0 to 50°C (32 to 122°F)
Dimensions	57 x 52 x 185mm (2.2 x 2.0 x 7.2 in)
Weight	528g (18.6 once)

## Corona Effect



A corona discharge is an electrical discharge brought on by the ionization of air surrounding a conductor that is electrically charged. Corona will occur when the strength of the electric field around a conductor is high enough to form a conductive region, but not high enough to cause electrical breakdown or arcing to nearby objects. Corona discharge from high voltage electric power transmission lines constitutes an economically **significant waste** of power for utilities. Corona effect generates gases which are **corrosive** and can **degrade and embrittle** nearby materials.

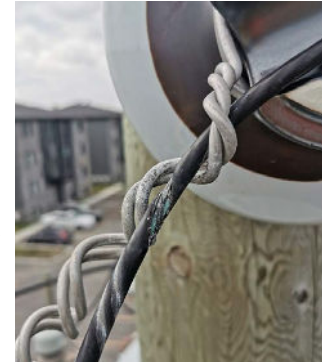

## ULD-40™ Detector

Built from durable materials, the ULD-40™ detector is designed to last for years with unbeatable performance. Simply press its power button, and voilà, the instrument is ready. Its built-in cone-shaped sensor offers high sensitivity for close range gas leak or corona effect detection. The level of detected ultrasonic activity will be displayed on its dB reading and bright LED bar graph. The operator can conveniently analyse the downscaled signal from the ULD's built-in speaker in order to discriminate real corona effect from ambient noise. With years of development and research work in the partial discharge field, ndb Technologies has perfected the art

of manufacturing reliable and easy to use instruments and the ULD-40™ is no exception.

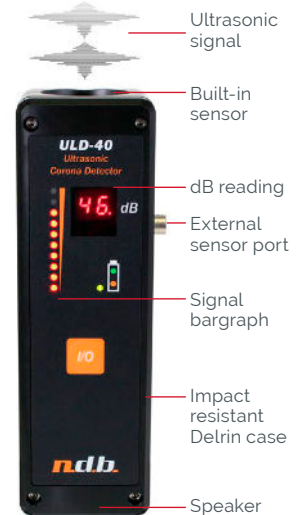

## Transportation Box

The ULD-40™ kit comes equipped with a hard shell case especially designed for the ULD-40™ and its accessories. Its rugged design will keep your instrument safe with enough space to store everything in one place.



## Noise-Isolating Headphones

Need to perform detection in noisy environments? Still want to analyze the downscaled audio coming from the ULD-40™ detector? The ULD-405™ headphones are especially chosen for their highly noise isolating properties and comfort. Simply connect the 3.5mm jack to the ULD's audio port and start scanning.



## Contact Sensor

The ULD-406™ direct contact sensor allows for convenient ultrasonic detection on metal clad cabinets (switchgear, RMU, cable box, etc.), resin dry-type transformer, cable splice, and many more. Its magnetic holders allows for easy scanning of multiple cabinet halls.



## Parabolic Sensor & Simulator

The ULD-401™ parabolic sensor allows for convenient pinpoint readings on hard-to-reach overhead accessories such as insulators, arrestors, cable termination, bushings, switches, and so on (optimized for 15m/49ft). Want to test your system periodically? The ULD-403™ ultrasonic noise generator is perfectly suited for this task.

